

Culligan®

Water Treatment Ancillaries Range



Tanks, Bunds & Dosing Pots




Leading the way in water treatment technology Culligan endeavour to provide a total water treatment solution for all our customers. To this end a wide range of ancillaries to compliment your water treatment plant are available. This ensures optimum performance and smooth running of any equipment.

For safe storage and use of specific water treatment chemicals, our range includes:

- Tanks
- Bunds
- Dosing Pots



All our products offer the highest level of quality and durability and are available directly from Culligan.

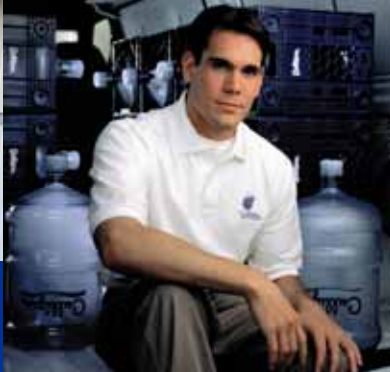

Tanks

Our range of dosing tanks are specially designed for use in the water and effluent treatment industry. They are manufactured from medium density polyethylene for maximum durability. The split level design helps to give extra strength and provides a useful area to mount dosing pumps, manual or electric agitators or any other monitoring devices.

All tanks come with either screw or push fit lids as standard. Tanks are available in either black or white.

Bunds

Bunds are available for use in conjunction with tanks to reduce the risk of spillage. Bunds are designed to be 110 per cent of the size of the complimentary tank. This helps to ensure, should a spillage occur, chemicals are contained in a safe area.

Bunds are blue in colour and manufactured from medium density polyethylene for maximum durability. The rotation moulding process used to produce these tanks is subject to shrinkage as the tanks cool, therefore dimensions may not be fully accurate.

Dosing Pots

Dosing Pots are used to feed liquid chemicals, such as corrosion inhibitors into closed systems. Dosing pots are manufactured from a mild steel shell complete with inlet and outlet valves. There is a drain, filling, air release and non-return valve fitted to all models.

For ease of installation dosing pots are supplied complete with wall mounting brackets and are handed (left or right).

Tanks					
Model	Dimensions d x h (mm)	Nominal Capacity (l)	Weight (Kg)	Cap Size (mm)	Aperture Size (mm)
DT50	425 x 500	50	3.5	190	130
DT100	495 x 700	100	7.5	220	130
DT200	660 x 790	200	11.0	220	180
DT300	660 x 1075	300	16.5	190	130
DT500	810 x 1070	500	21.0	220	180
DT1000	1065 x 1355	1000	35.0	270	195

Bunds			
Model	Dimensions d x h (mm)	Nominal Capacity (l)	Weight (Kg)
BD25	430 x 310	30	3.5
BD50	680 x 285	55	2.7
BD100	805 x 325	110	4.0
BD200	970 x 395	220	6.0
BD300/500	1130 x 680	550	11.0
BD1000	1825 x 560	1100	15.0

Dosing Pots				
Model	Capacity (l)	Dimensions h x w (mm)	Connection Valves (mm)	Pressure (bar)
	5	540 x 265	15	14
	15	720 x 315	15	10
	25	775 x 375	20	8

Quality Systems certified according to UNI ISO:9001

Culligan International (UK) Ltd, Culligan House, The Gateway Centre, Coronation Road, High Wycombe, Buckinghamshire HP12 3SU

T: 01494 838 107

F: 01494 523 833

E: commercial@culligan.co.uk www.culligan.co.uk

In the interest of product development we reserve the right to alter specifications without prior notice. All photographs are to be used as guide only. E & OE.—ME0738